





3-WAY INVESTMENT CASTING BALL VALVE L-PORT / T-PORT

ISO 9001

**MODEL: BV-3ASL (L-PORT)
BV-3AST (T-PORT)**


บอลวาล์วสามทางสแตนเลส 316

- * The available THREAD: ANSI B2.1, BS21 or DIN-259.
- * Reduce Bore / Locking Device.
- * Without Mounting Pad.
- * 1000 PSI W.O.G.

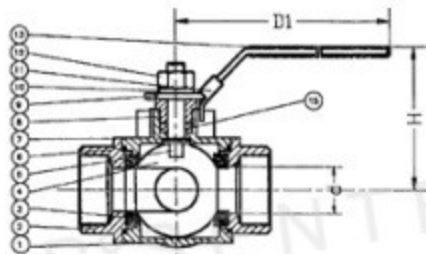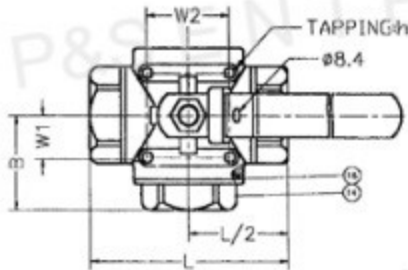

Material

| Model | BV-3ASL / BV-3AST | |
|-------|-------------------|------------|
| 1 | Body | CF8M |
| 2 | End Cap | CF8M |
| 3 | Seat | PTFE |
| 4 | Ball | CF8M |
| 5 | Stem | S/S 316 |
| 6 | Gasket | PTFE |
| 7 | Thrust Washer | PTFE |
| 8 | Gland | S/S 316 |
| 9 | Handle | S/S 304 |
| 10 | Handle Washer | S/S 304 |
| 11 | Locking Plate | S/S 304 |
| 12 | Handle Nut | S/S 304 |
| 13 | Handle Sleeve | VINYL GRIP |
| 14 | Cap | CF8M |
| 15 | Stem Packing | PTFE |
| 16 | Gasket | PTFE |

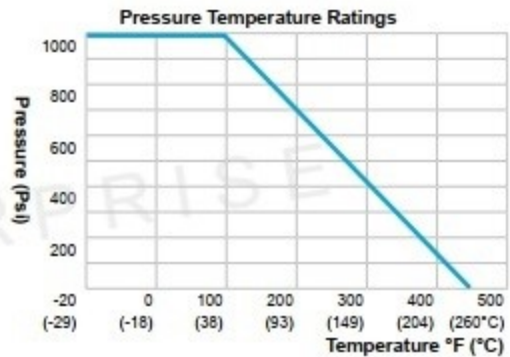

Dimension

mm

| Size | inch | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1.1/4 | 1.1/2 | 2 |
|------|------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|
| | mm | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 |
| d | | 11.0 | 11.0 | 12.7 | 16.0 | 20.0 | 25.0 | 32.0 | 38.1 |
| L | | 69.4 | 69.4 | 76 | 86.6 | 102 | 118 | 126 | 149 |
| H | | 61 | 61 | 65.5 | 71 | 76 | 81.5 | 102 | 112 |
| D1 | | 106 | 106 | 138 | 138 | 157 | 157 | 222 | 222 |
| B | | 35 | 35 | 37 | 45 | 51 | 58 | 63 | 77 |
| W1 | | 13 | 13 | 13 | 21 | 21 | 24 | 24 | 24 |
| W2 | | 28.5 | 28.5 | 28.5 | 34.6 | 34.6 | 38 | 38 | 38 |
| h | | 10-24 UNC | 10-24 UNC | 10-24 UNC | 10-24 UNC | 10-24 UNC | 1/4-20 UNC | 1/4-20 UNC | 1/4-20 UNC |