


STAINLESS STEEL GLOBE VALVE CLASS 600

Investment casting ASTM-A351, CF8M, Class 600,
Screwed bonnet, Beveled disc,
Integral seat, Rising-stem, and Handwheel.

* Connecting threads screwed ends to BS21 basically,
ANSI B2.1 and DIN 259 are available when required.
* Pressure Temperature Ratios 600 PSI, WSP/350°F.

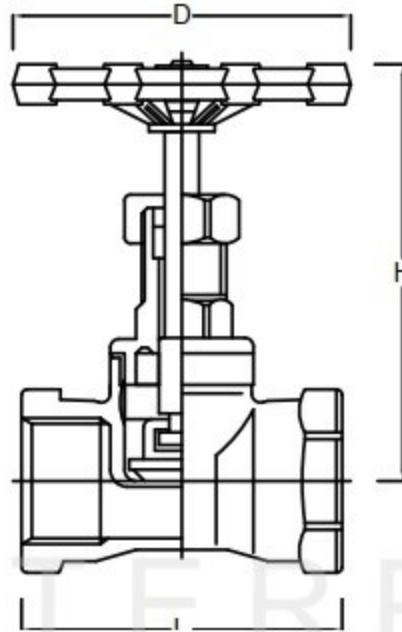

Hydrostatic Test Pressure

Shell 21 kg/cm²
Seat 6 kg/cm² (AIR)

โกลบอลวาล์วสแตนเลส 316 เกลียว

Material

	Model	SS-208
1	Body	CF8M
2	Bonnet	CF8M
3	Stem	AISI 316
4	Gasket	TEFLON
5	Disc	CF8M
6	Packing	TEFLON
7	Gland	AISI 316
8	Cap Nut	CF8M
9	Handle	DUCT IRON
10	Spin Washer	AISI 304
11	Stem Nut	AISI 304

Dimension mm

Size	inch	1/2	3/4	1	1.1/4	1.1/2	2
	mm	15	20	25	32	40	50
L		63	70	77	87	100	110
H		106	106	116	122	144	145
D		62	62	75	75	95	95
Weight/kgs		0.4	0.5	0.7	0.9	1.35	1.65