


เกทวาล์ว(ประตูน้ำ) ทองเหลืองเกลียว

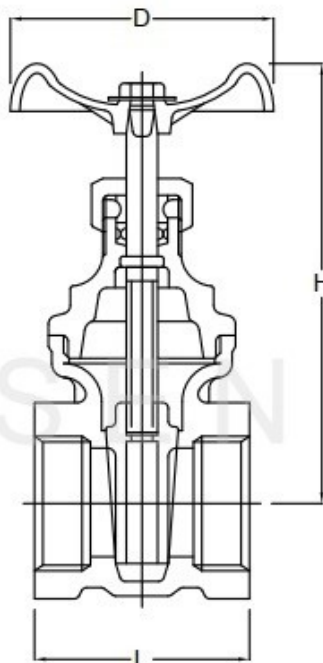

\* Screwed bonnet, Non-rising stem, Solid wedge disc, Integral seat.

\* The available Thread: BS21 or ANSI B2.1

## Working Pressure

200 psi. W.O.G. non-shock

125 psi. S.P. saturated

## Hydrostatic Test Pressure

Shell 300 psi.

Seat 200 psi

## Material

| Model         | BG-P42       |
|---------------|--------------|
| Body          | CAST BRASS   |
| Bonnet        | CAST BRASS   |
| Stem          | FORGED BRASS |
| Packing Nut   | BRASS        |
| Disc          | CAST BRASS   |
| Handwheel     | CAST IRON    |
| Wheel Nut     | BRASS ROD    |
| Name Plate    | BRASS        |
| Lock Nut      | BRASS ROD    |
| Gland Packing | NBR          |

## Dimension

mm

| Size              | inch | 1/4 | 3/8 | 1/2 | 3/4 | 1  | 1.1/4 | 1.1/2 | 2   | 2.1/2 | 3   | 4   |
|-------------------|------|-----|-----|-----|-----|----|-------|-------|-----|-------|-----|-----|
|                   | mm   | 8   | 10  | 15  | 20  | 25 | 32    | 40    | 50  | 65    | 80  | 100 |
| L End to end      |      | 40  | 41  | 43  | 48  | 53 | 59    | 63    | 69  | 86    | 96  | 115 |
| H Height (open)   |      | 74  | 74  | 76  | 84  | 96 | 115   | 124   | 142 | 186   | 215 | 260 |
| D Handwheel dim.  |      | 53  | 53  | 53  | 53  | 58 | 73    | 73    | 84  | 100   | 115 | 130 |
| Packing (pcs/box) |      | 120 | 120 | 120 | 80  | 64 | 36    | 30    | 20  | 12    | 6   | 4   |