


Investment casting, ASTM-A351, CF8M, Class 600,  
Inside screw and Screwed bonnet. Wedge disc.  
Integral seat, Non-rising stem, and Handwheel.

\* Connecting threads screwed ends to BS21 basically,  
ANSI B2.1 and DIN 259 are available when required.  
\* Pressure Temperature Ratios 600 PSI, WSP/350°F.

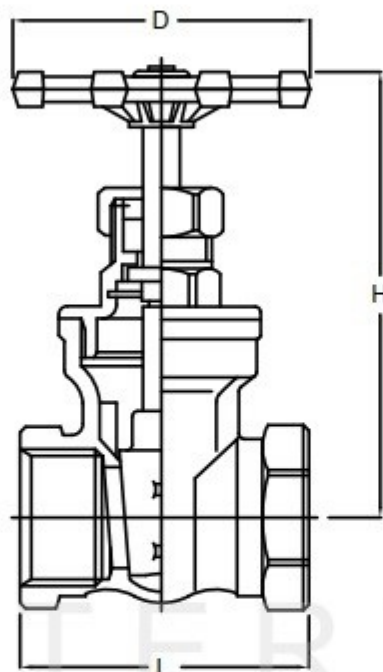

## Hydrostatic Test Pressure

Shell 21 kg/cm<sup>2</sup>

Seat 6 kg/cm<sup>2</sup> (AIR)

เกทวาล์ว(ประตูน้ำ)สแตนเลส 316 เกลียว

## Material

|    | Model        | SS-207    |
|----|--------------|-----------|
| 1  | Body         | CF8M      |
| 2  | Disc         | CF8M      |
| 3  | Stem         | AISI 316  |
| 4  | Cap          | CF8M      |
| 5  | Gasket       | TEFLON    |
| 6  | Snap Ring    | AISI 304  |
| 7  | Stem Packing | AISI 304  |
| 8  | Packing      | TEFLON    |
| 9  | Gland Washer | AISI 304  |
| 10 | Cap Nut      | CF8M      |
| 11 | Spin Washer  | AISI 304  |
| 12 | Handle       | DUCT IRON |
| 13 | Nut          | AISI 304  |

## Dimension

mm

| Size       | inch | 1/2 | 3/4 | 1    | 1.1/4 | 1.1/2 | 2    | 2.1/2 | 3   |
|------------|------|-----|-----|------|-------|-------|------|-------|-----|
|            | mm   | 15  | 20  | 25   | 32    | 40    | 50   | 65    | 80  |
| L          |      | 57  | 61  | 69   | 78.5  | 81.5  | 94.5 | 116   | 131 |
| H          |      | 100 | 100 | 123  | 135   | 150   | 170  | 260   | 295 |
| D          |      | 62  | 62  | 75   | 75    | 95    | 95   | 120   | 120 |
| Weight/kgs |      | 0.4 | 0.5 | 0.75 | 1.1   | 1.45  | 2.1  | 4.6   | 7.0 |