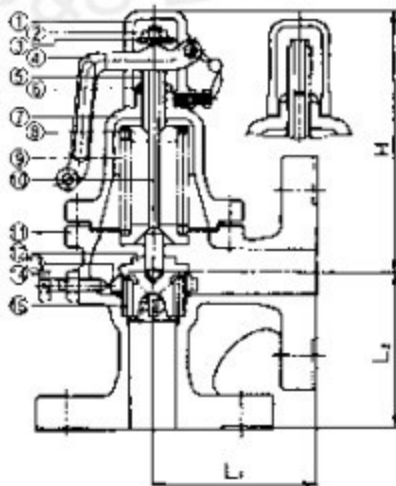


**MODEL:**
**S3F-A / WITHOUT LEVER**
**S3F-LR / WITH LEVER**
**เซฟตี้วาล์วเหล็กหล่อ**  
**หน้าแปลน 10K**

**มีด้าม / ไม่มีด้าม**


When placing order, please indicate Working Pressure

 (Spring adjusting range:  $\pm 1 \text{ kg/cm}^2$ )

Type	W/O Lever (A)	With Lever (LR)
Working Fluid	Steam, Air, Liquid.	Steam, Air.
Test on Body	FC, FCD :	22 kgf/cm <sup>2</sup> g (Hydrostatic)
	WCB, SCS13, SCS14:	44 kgf/cm <sup>2</sup> g (Hydrostatic)
Working Pressure	FC, FCD :	0.35~10 kgf/cm <sup>2</sup> g (150PSI)
	WCB, SCS13, SCS14:	1~20 kgf/cm <sup>2</sup> g (300PSI)
Flange	FC, FCD :	JIS 10 kgf/cm <sup>2</sup> g (150PSI)
	WCB, SCS13, SCS14:	JIS 20 kgf/cm <sup>2</sup> g (300PSI)
Working Temp.	0°C ~ 250°C	
Connection	FLANGED END TO JIS10K, 20K, ANSI 150 LBS.	

**Material** SL24/23

No. / Part	W/O Lever	S3F-A
	With Lever	S3F-LR
1	Cap	FC
2	Hexagon Nut	SS 41
3	Lever Washer	SS 41
4	Lever	FC
5	Adjusting Bolt	BC
6	Stop Nut	BC
7	Bonnet	FC
8	Spring Seat	FC
9	Spring	STEEL
10	Stem	SUS 304
11	Body	FC
12	Valve Body	SUS 304
13	Adjusting Ring	BC
14	Adjusting Screw	SS 41
15	Valve Seat	SUS 304

**Dimension**
**mm**

inch	1/2	3/4	1	1.1/4	1.1/2	2	2.1/2	3	4	5	6	8	10	12	14	16
mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L1	80	80	85	95	95	110	135	145	160	175	180	250	290	320	350	370
L2	80	80	85	95	95	105	115	125	150	175	180	255	290	320	350	370
H	142	142	142	232	232	256	292	375	439	565	610	705	710	830		