


CAST IRON PRESSURE REDUCING VALVE CLASS 10K

รีดิวซิงวาล์วเหล็กหล่อหน้าแปลน 10K

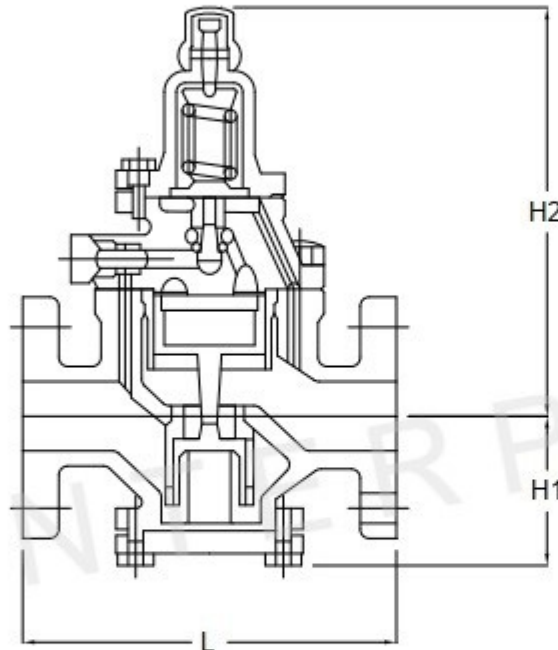

- End Flange Acc. To JIS 10K
- Working Fluid: Steam
- Working Temperature: 180°C
- Max. Temperature: 220°C
- Test Pressure: Body 20kgf/cm² (Hydrostatic)
- Primary Pressure: 1kgf/cm² - 10kgf/cm² (PR-3AF)
- Inlet P: 10kgf/cm² - Outlet P: 1-7kgf/cm²

Material

Model	PR-3AF
Body Val Top Cap	IRON
Bottom Cover	IRON
Lower Gasket	ASBESTOS
Diaphragm Disc	SUS 301
Valve Seat	SS304
Spring	SUP-6
Spring Seat	SS41
Piston/Cylinder	SS304
Packing	PTFE
Screen	SS304
Adjust Scr. Nut	SS41
Bolt	SS41

Dimension

Size	inch	1/2	3/4	1	1.1/4	1.1/2	2	2.1/2	3	4	5	6
	mm	15	20	25	32	40	50	65	80	100	125	150
L		155	155	165	195	195	225	250	290	330	410	410
H1		74	74	74	99	99	116	125	135	153	195	195
H2		260	260	260	280	280	310	322	325	370	540	540

mm