


CAST IRON STEAM TRAP CLASS 16K



สตีมแทร็ปเหล็กหล่อ
หน้าแปลน 10K

BONNET:
1/2", 3/4", 1" OCTAGON
1 1/4", 1 1/2", 2" TETRAGON

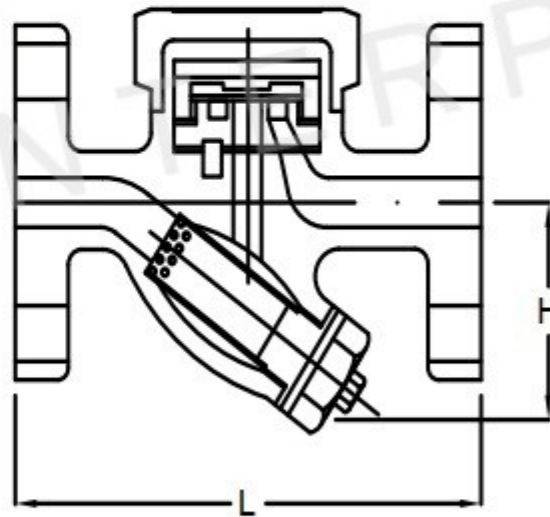

- End Flange Dimensions: Acc. to JIS 10K or ANSI 150 LBS
- Working Temperature: 120°C
- Max. Temperature: 220°C
- Test Pressure: Body 32 kgf/cm² (Hydrostatic)
- Working Pressure: 0.3 kgf/cm² - 16 kgf/cm²

Material

Model	ST-T3F
Body	IRON
Bonnet/Plug	IRON
Seat	SS 410
Disc	SS 304
Seal	PTFE
Packing	PTFE
Screen	SS 304

Dimension

mm

Capacity

kgf/H

Size	inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
L		142	160	182	244	244	268
H		67	73	92	107	107	125

P kg/cm ²	0.3	0.6	1	2	3	4	5	6	8	10	12	14	16
15 - 25	183	220	253	300	345	385	420	450	510	570	630	690	740
32	350	410	490	620	730	820	900	960	1080	1200	1320	1440	1560
40	440	520	610	780	900	1000	1090	1180	1350	1500	1650	1790	1930
50	460	560	670	850	1000	1110	1220	1320	1500	1680	1860	2030	2200